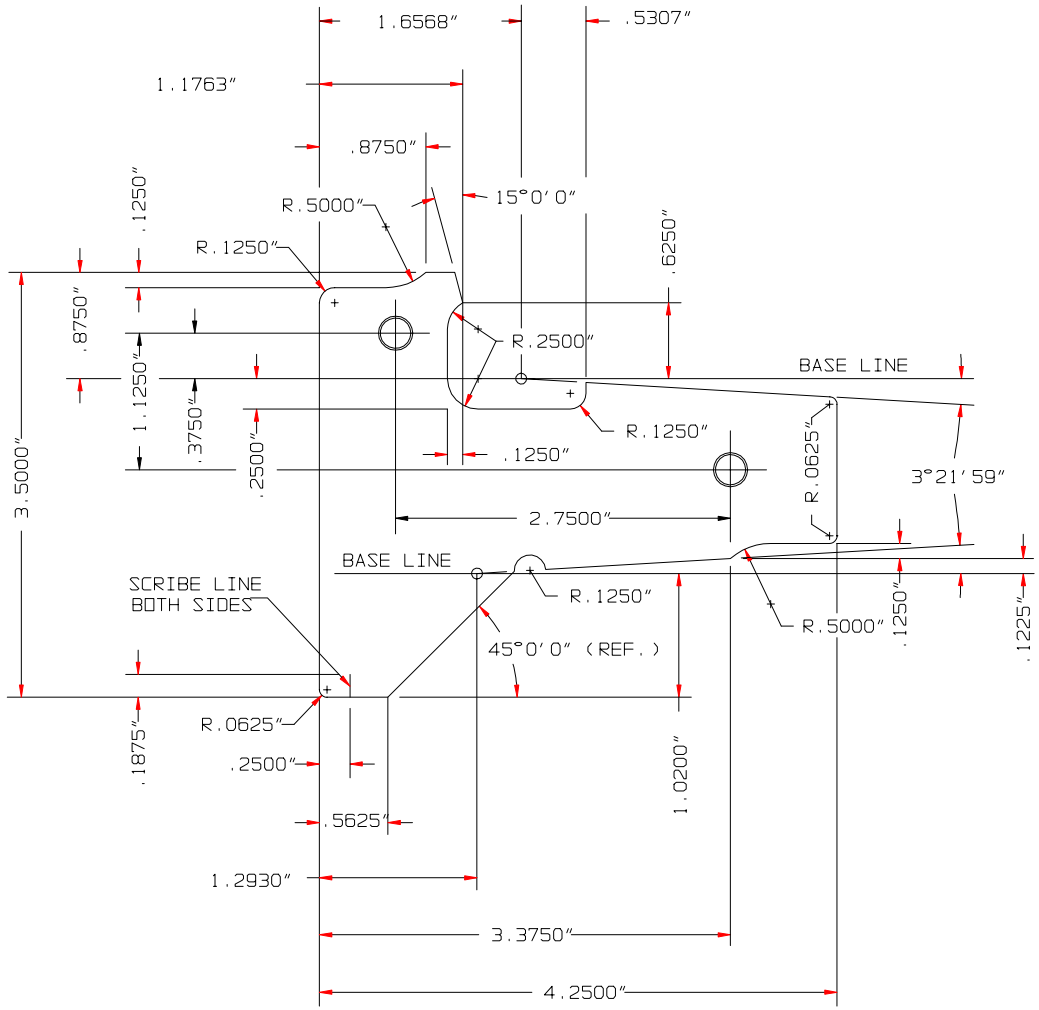

VERIFY USING CONTOUR MAPPING
MAXIMUM MANUFACTURE DEVIATION FROM NOMINAL: .003"
MAXIMUM RECERTIFICATION DEVIATION FROM NOMINAL: .005"

LIMIT WEAR GAGE FOR CHECKING MINIMUM FLANGE THICKNESS, HEIGHT & THROAT RADII GAGE FOR AAR-1B NARROW FLANGE TREAD PROFILE

REFERENCE:
AAR G MANUAL
Standard S-664
Adopted 1991
Effective March 29, 1991
Supersedes S-604

Material:
Stainless Steel
Thickness: 1/8"
Hardened

Scale: .6X

WINCHESTER INDUSTRIES INC.

AAR G MANUAL S-664

SIZE	Job#	DWG NO.	Disk	REV
A		W668		B

CUSTOMER | ENG JCD 03/01/97